

**GENERAL BUILDING DATA**

**CONCRETE**

Items	Feet
Width	24'-0"
Length	36'-0"
Eave Height	10'-0"
Roof Pitch	4/12
Truss Spacing	2'-0"

Exterior walls shall be supported by continuous solid concrete foundations and shall extend below the local frost depth. 12" below grade in Lane County.

**DESIGN CRITERIA**

Items	Unit
Wind Speed	105 mph
Exposure	C
Seismic Zone	D2
Snow Load	25 psf
Soil Bearing	1500 psf

Foundations and slab on grade shall have a minimum compressive strength of 2500 psi.

Finish grade shall slope 6" in the first 10'-0" away from the building.

Exterior siding shall be 6" minimum above finished grade or pressure treated lumber.

The area within the foundation walls shall have all vegetation, top soil, and foreign materials removed.

**GENERAL NOTES**

**LATERAL BRACING**

The owner/contractor shall verify all dimensions and site conditions before starting work. The owner/contractor shall notify the local Building Codes Division of any discrepancies, changes, omissions, or substitutions that are not permitted without the approval of the local Building Department having jurisdiction. All workmanship shall conform to Oregon Residential Specialty Code.

Braced wall panels shall be 7/16" thick structural sheathing minimum 48" in length located at each corner and not to exceed 25' o.c. as indicated on floor plan. Openings are prohibited in these locations. Nail spacing shall be 8d common nails 6" o.c. for edges and 12" o.c. for field nailing. Plate washers a minimum 3"x 3"x0.229" shall be provided for the anchor bolts at each 48" braced wall panel.

The structure is designed to function as a unit upon completion. The owner/contractor is responsible for methods and sequences of assembling the structure. The owner/contractor is responsible for the stability of the structure during the construction and prior to completion of all walls, roof, and floor diaphragms.

Studs shall be continuous from foundation sill plate to wall top plate. Asphalt saturated felt or other approved material shall be applied over exterior wall structural sheathing.

**ROOFS**

All trusses are required to be designed and stamped by an Oregon registered engineer.

**MAN DOORS**

**HEADERS**

3'-0"x 6'-8"

**REVIEWED FOR CODE COMPLIANCE**  
**LANE COUNTY**  
 INITIALED \_\_\_\_\_  
 DATE: \_\_\_/\_\_\_/20\_\_\_


**LANE COUNTY READY-BUILD UTILITY OCCUPANCY ONLY**

Span	Material	Location
8'-0"	6 x 10 df #2	Garage opening
8'-0"	5.125"x 7.5" Glulam 24F - V4	Garage opening
8'-0"	(3) 2 x 8 df #2	Garage opening
16'-0"	6 x 14 df #1	Garage opening
16'-0"	5.125"x 12" Glulam 24F-V4	Garage opening
16'-0"	5.25"x 11.25" Versa Lam 3100	Garage opening




**FOOTINGS MUST REST ON  
UNDISTURBED SOIL 12" MINIMUM  
BELOW GRADE IN LANE COUNTY**


1/2"x 10" anchor bolts 6'-0" o.c. on 2 x 6  
P.T. sill plate. WITH PLATE WASHERS  
3" x 3" x 0.229" R602.11.1



EMBED ANCHOR BOLTS 7" MINIMUM  
1/2"x 10" anchor bolts 6'-0" o.c. on 2 x 6  
P.T. sill plate on 8" CMU

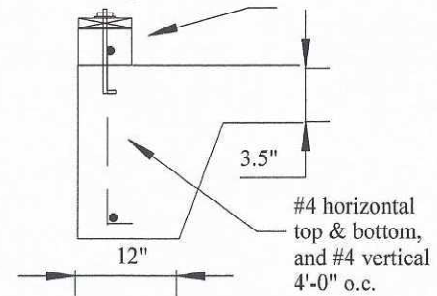

1/2"x 10" anchor bolts 6'-0" o.c. on 2 x 6  
P.T. sill plate.

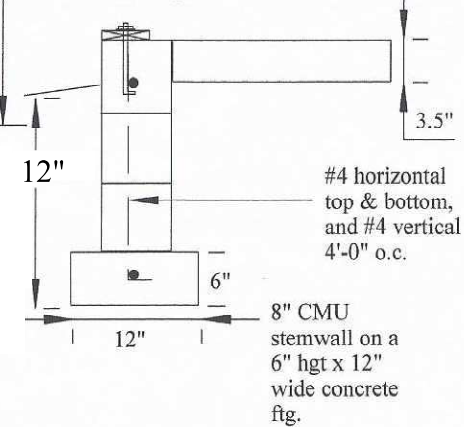

**PLEASE REFER TO THE ATTACHED RESIDENTIAL  
CODE SUMMARY / MOST COMMONLY MISSED  
ITEMS. THIS ATTACHMENT IS PART OF THE  
APPROVED PERMIT PACKET AND MUST REMAIN ON  
SITE AT ALL TIMES. PLEASE READ AND  
INCORPORATE THE ITEMS PERTINENT TO THE  
SCOPE OF THE WORK INTO THE CONSTRUCTION.**

**PERMITS FOR ALL ELECTRICAL WORK  
SHALL BE SECURED FROM THE LANE  
COUNTY ELECTRICAL PROGRAM AT  
3050 N. DELTA HWY, EUGENE, OR 97408**


**FOUNDATION**


**S02**

**BUILDING  
CODE  
ORSC 2017**

**READY BUILD PLAN #2014-10  
PRESCRIPTIVE FRAME  
TWO CAR GARAGE/STORAGE  
24' x 36' x 10'**

LANE COUNTY  
LAND MANAGEMENT DIVISION  
3050 N. DELTA HWY  
EUGENE, OREGON 97408  
PHONE: 541-682-4651  
FAX: 541-682-3947



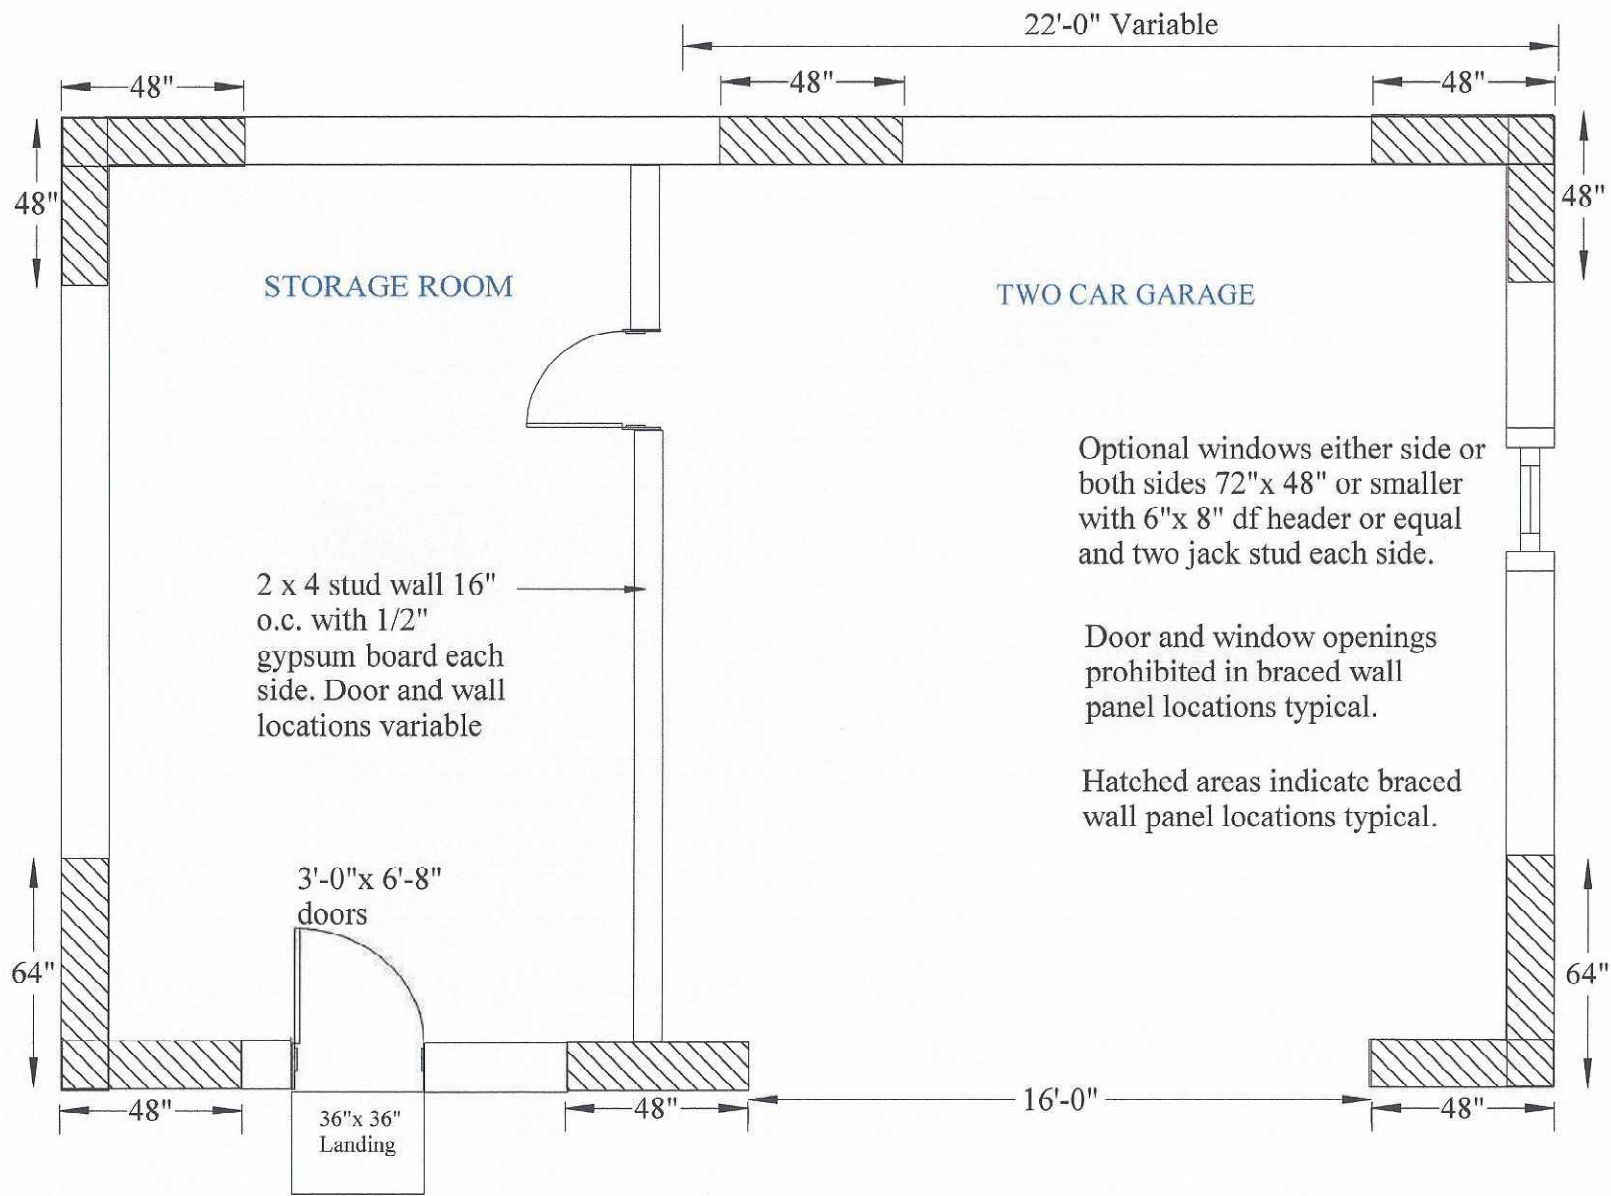


FLOOR PLAN S03

BUILDING CODE ORSC 2017

READY BUILD PLAN #2014-10  
 PRESCRIPTIVE FRAME  
 TWO CAR GARAGE/STORAGE  
 24'x 36'x 10'

LANE COUNTY  
 LAND MANAGEMENT DIVISION  
 3050 N. DELTA HWY  
 EUGENE, OREGON 97408  
 PHONE: 541-682-4651  
 FAX: 541-682-3947



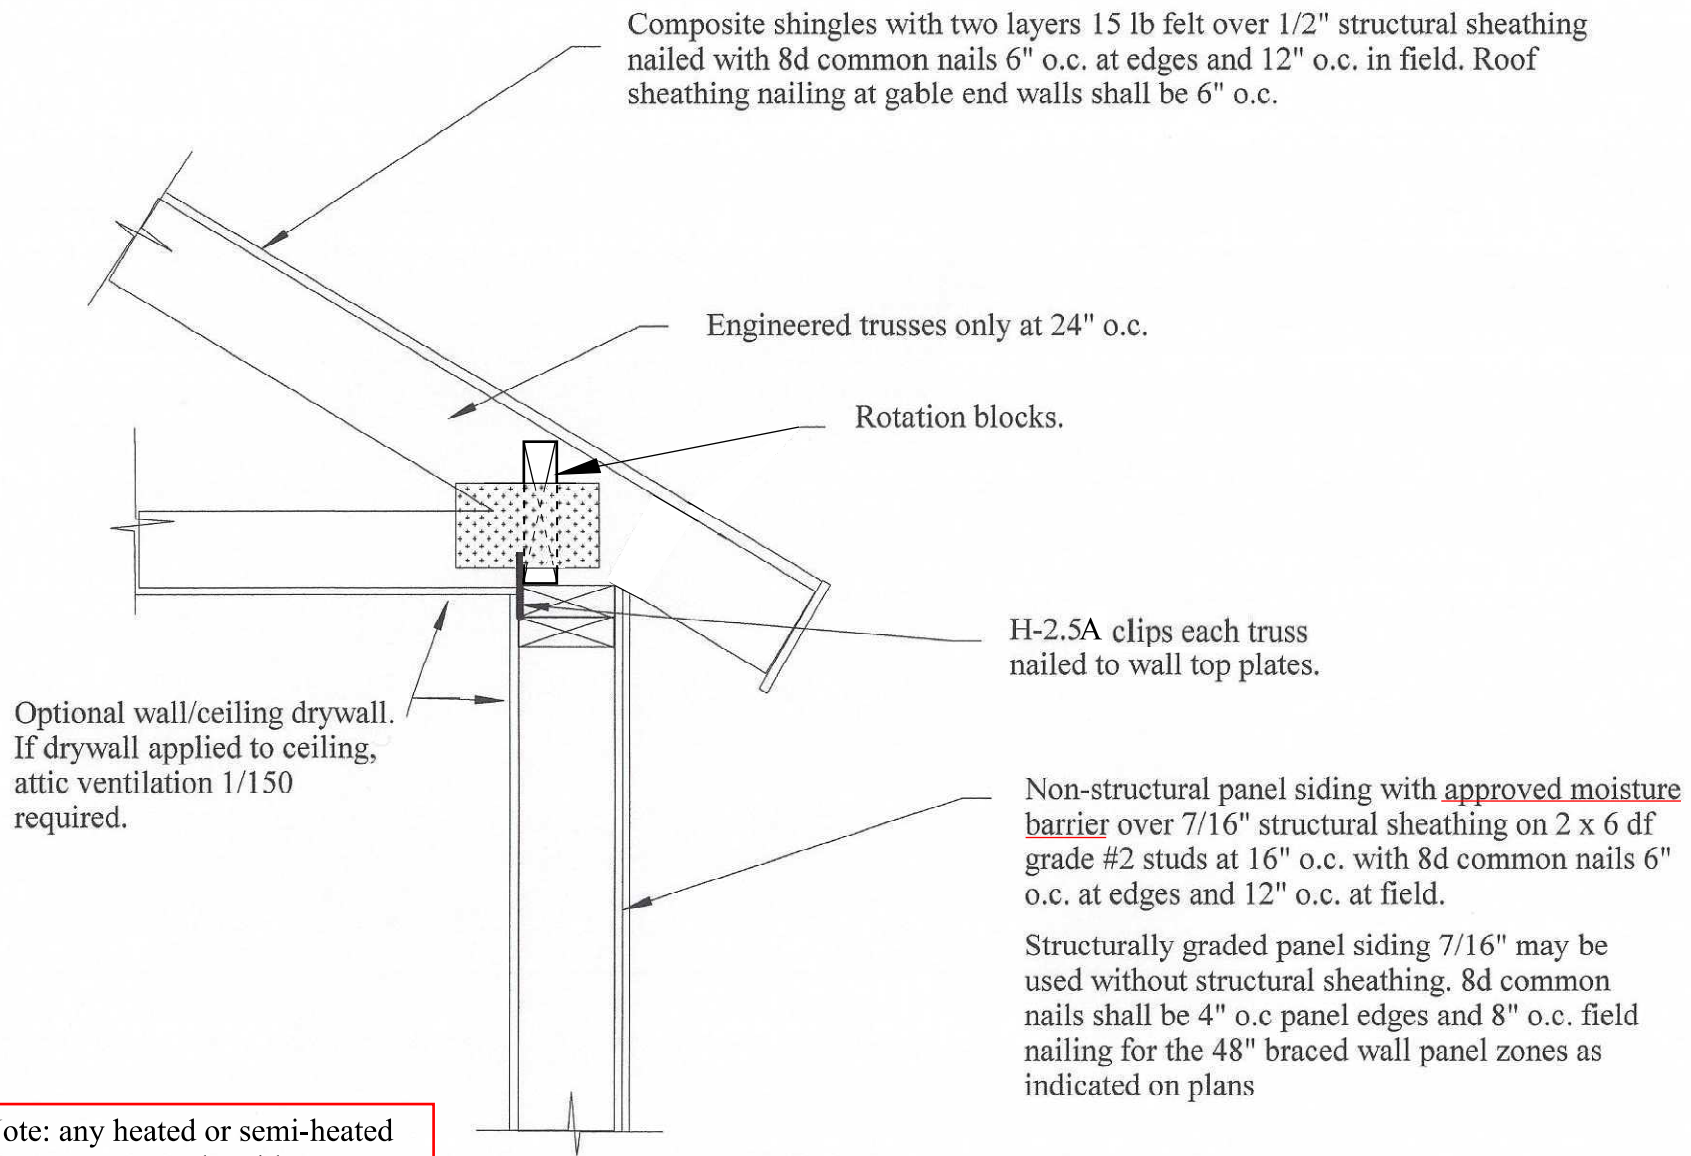

Composite shingles with two layers 15 lb felt over 1/2" structural sheathing nailed with 8d common nails 6" o.c. at edges and 12" o.c. in field. Roof sheathing nailing at gable end walls shall be 6" o.c.

Engineered trusses only at 24" o.c.

Rotation blocks.

H-2.5A clips each truss nailed to wall top plates.

Optional wall/ceiling drywall. If drywall applied to ceiling, attic ventilation 1/150 required.

Non-structural panel siding with approved moisture barrier over 7/16" structural sheathing on 2 x 6 df grade #2 studs at 16" o.c. with 8d common nails 6" o.c. at edges and 12" o.c. at field.

Structurally graded panel siding 7/16" may be used without structural sheathing. 8d common nails shall be 4" o.c panel edges and 8" o.c. field nailing for the 48" braced wall panel zones as indicated on plans

Note: any heated or semi-heated space must comply with current energy codes according to use. Coordinate at the time of building permit application and prior to construction and apply for mechanical and electrical permits.

**ROOF/WALL  
DETAILS  
S04**


**BUILDING  
CODE  
ORSC 2017**

**READY BUILD PLAN #2014-10  
PRESCRIPTIVE FRAME  
TWO CAR GARAGE/STORAGE  
24' x 36' x 10'**


LANE COUNTY  
LAND MANAGEMENT DIVISION  
3050 N. DELTA HWY  
EUGENE, OREGON 97408  
PHONE: 541-682-4651  
FAX: 541-682-3947




Side View

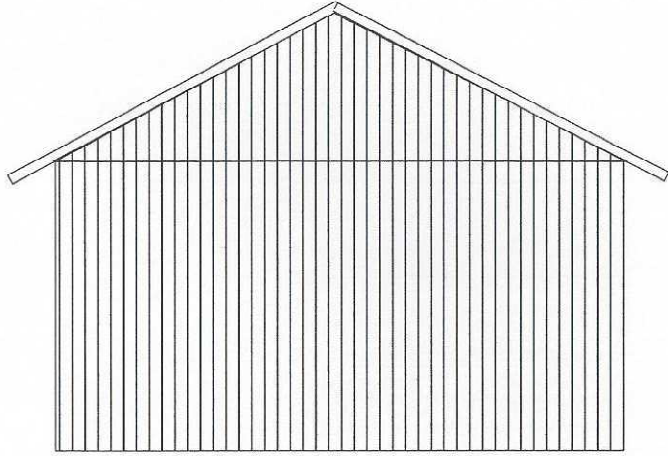


Side View

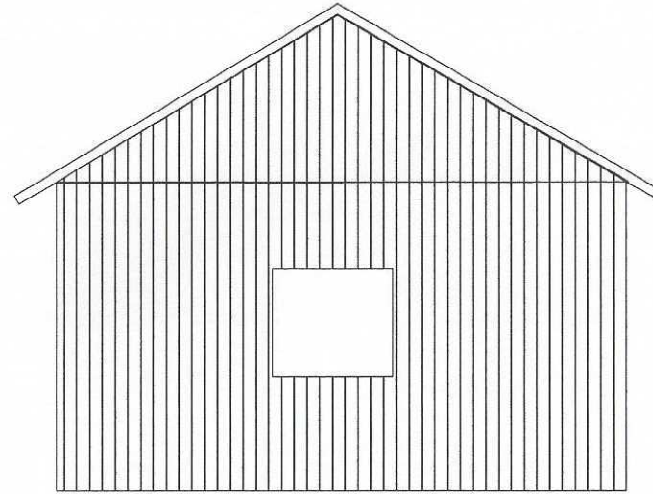

Front View

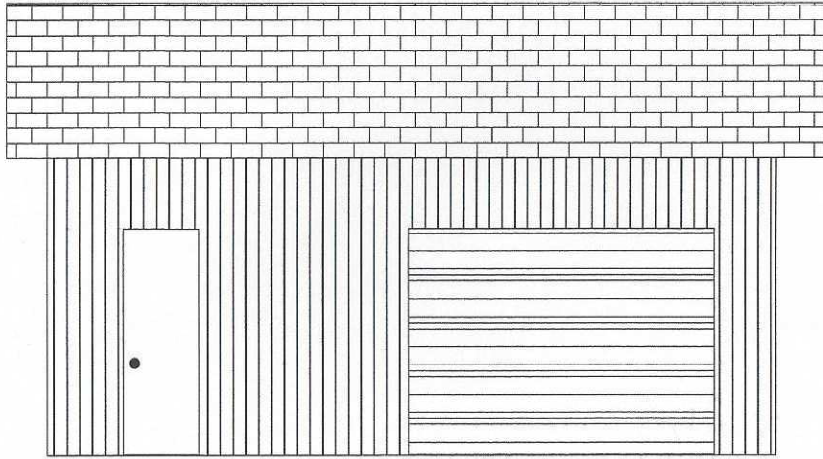

Rear View

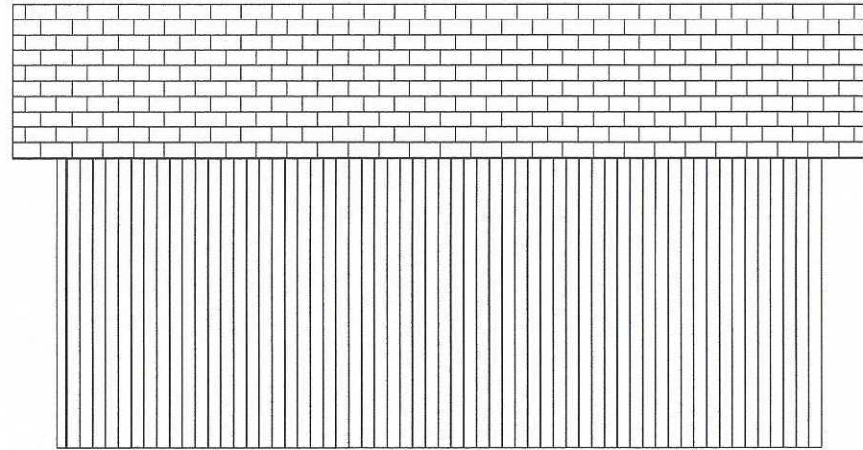


**EXTERIOR  
ELEVATIONS  
S05**

**BUILDING  
CODE  
ORSC 2017**

**READY BUILD PLAN #2014-10  
PRESCRIPTIVE FRAME  
TWO CAR GARAGE/STORAGE  
24' x 36' x 10'**

**LANE COUNTY  
LAND MANAGEMENT DIVISION  
3050 N. DELTA HWY  
EUGENE, OREGON 97408  
PHONE: 541-682-4651  
FAX: 541-682-3947**





LANE COUNTY  
LAND MANAGEMENT DIVISION  
3050 N. DELTA HWY  
EUGENE, OREGON 97408  
PHONE: 541-682-4651  
FAX: 541-682-3947

## Ready-build plans

### Modifications to ready-build plans

Plans may be modified in the following ways and remain ready-build plans. The local jurisdiction must verify that the plan design criteria meets or exceeds the associated site criteria.

- Specified eave height is the maximum height. Eave height may be reduced.
- Specified roof pitch is the maximum pitch. Pitch may be reduced to 3:12.
- Specified frame spacing is the maximum spacing. Frame spacing may be reduced.
- Specified length is the maximum length. Length may be reduced, but must not be less than the width specified on the plan. Allowed openings must be reduced by the same length that was removed from the overall building length.
- Openings shown may be changed to walls except one three-foot wide by six-foot, eight-inch tall side-hinged door must be provided somewhere on the exterior. eight-inch tall side-hinged door must be provided somewhere on the exterior.

The division does not approve modifications to the plans. Plan modifications beyond the limits indicated above are expressly subject to local jurisdiction approval on a site-specific basis. indicated above are expressly subject to local jurisdiction approval on a site-specific basis.

**LANE COUNTY DOES NOT APPROVE MODIFICATIONS TO READY-BUILD PLANS BEYOND THE LIMITS INDICATED ABOVE.**

**USE OF READY BUILD PLANS IMPLIES ACKNOWLEDGEMENT OF THESE REQUIREMENTS**